


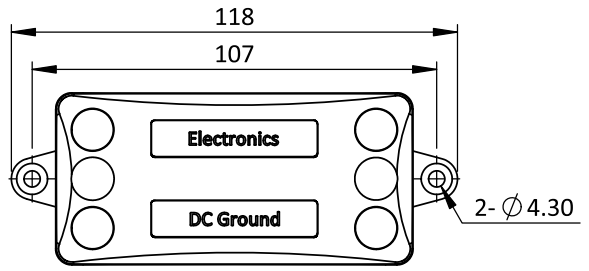


REV	DESCRIPTION	DATE
A	Initial Release	16.12.16





**6Px2**

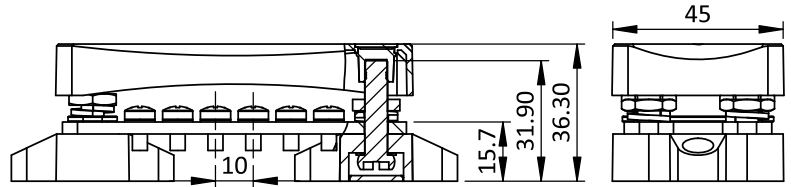



**6Px2 with cover**

**Features**

- Glass fiber reinforced Nylon base ensures great mechanical strength and durability
- Optional transparent insulating cover with recessed area for label stickers
- Tin-plated copper bus allowing current up to 100A or 150A
- Stainless steel studs and screws provide great anti-corrosion ability on board
- Insulated base ensures no leakage to metal hulls

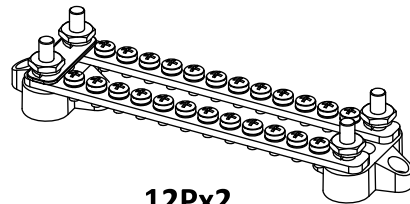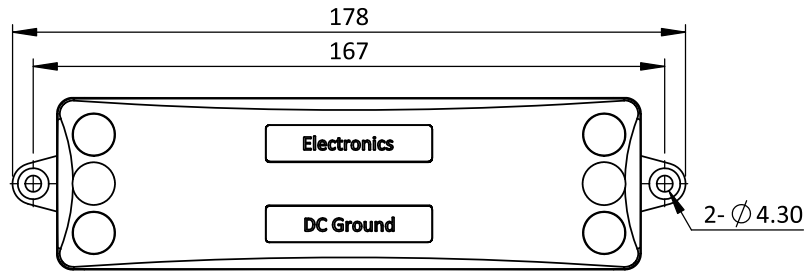

**12Px2**

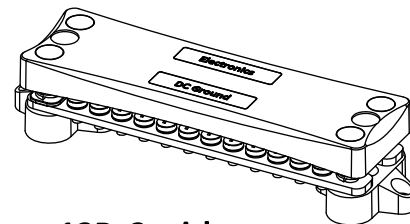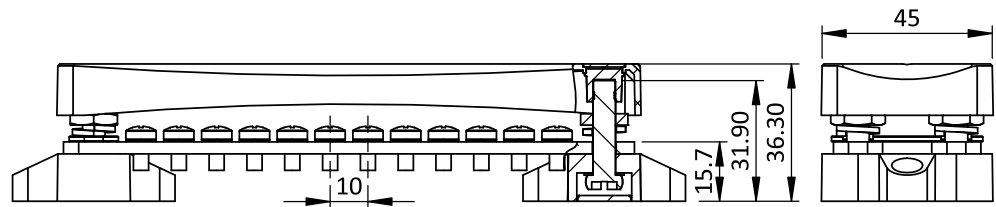

**12Px2 with cover**

**Part No.**

BSB-D-42X-XXP-C  
 1 2 3

1. Power Rating  
 2: 100A    6: 150A
2. Connection Pole(Per Row)  
 06: 6P  
 12: 12P
3. Optional Protection Cover  
 Blank: without  
 C: with Cover

Product ID	Struds	Screws	Rating	Bus Material
BSB-D-422-6P	4 x M6 (1/4")	12 x M4 (5/32")	100A	Brass
BSB-D-422-12P	4 x M6 (1/4")	24 x M4 (5/32")	100A	Brass
BSB-D-426-6P	4 x M6 (1/4")	12 x M4 (5/32")	150A	Copper
BSB-D-426-12P	4 x M6 (1/4")	24 x M4 (5/32")	150A	Copper

Size	0.5-6	>6-30	>30-120	>120-400
Tol	+/-0.05	+/-0.1	+/-0.15	+/-0.2

Truecom Technology Corp.				DRAWN BY	TOMMY
				CHECKED	DEREK
TITLE:	Dual Row Bus Bars			APPROVED	DEREK
PART NO:	BSB-D-42X-XXP-C			DRAWING NO.	
SCALE	1:2	REV	A	UNIT	mm