

GPS & GLONASS Internal Antenna

Product Number:ATIGG2540

1 · SCOPE

This product can be used as various GPS receivers navigation, GPS clock, positioning.


2 • OVERALL PERFORMANCE(Antenna Element, LNA & Cable)

CHARACTERISTICS	SPEC
Center Frequency	GPS: 1575.42±1.023MHz
	GLONASS : 1602~1615.5±0.51 MHz
	(When the antenna are placed on the customer's
	device inside)
Voltage	DC 2.7 - 5V
Current	13 mA max
Gain	25dB typ
Noise Figure	2.0dB max
Bandwidth(10dB return loss)	10 MHz min
Output VSWR	2.0 max
Output Impedance	50ohm
Dimensions	25mm(L)×25mm(W)×6.8 mm(H) typ
Weight	9±2g(typ)
Cable	60±2mm (Φ=1.13mm)
Connector	IPEX (Pull=0.4Kg)



3 • Patch antenna


CHARACTERISTICS	SPEC
Dimensions	25mm(L)×25mm(W)×4mm(H) typ
Center Frequency	GPS: 1575.42±1.023MHz GLONASS: 1602~1615.5±0.51 MHz (27mm(L)×27mm(W) Ground)
Bandwidth(10dB return loss)	10 MHz min
Peak Gain	2.0 dB typ
Output V.S.W.R	2.0dB max
Output Impedance	50ohm
Polarization	R.H.C.P

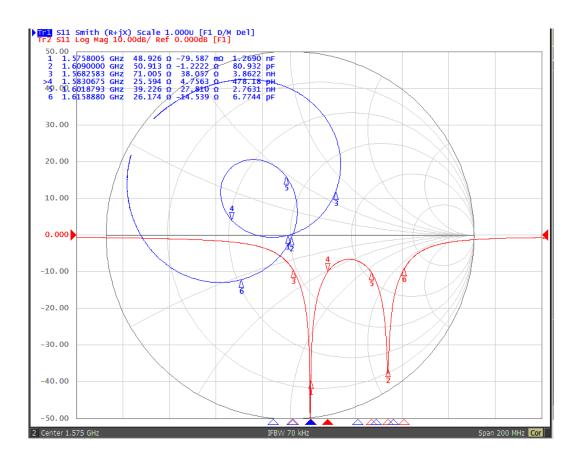




4 • LNA/Filter

CHARACTERISTICS	SPEC
Voltage	DC 2.7 - 5V
Current	13 mA max
Center Frequency	GPS : 1575.42±1.023MHz GLONASS : 1602~1615.5±0.51 MHz
Gain	25 ±2dB typ
Noise Figure	1.5dB max
Filter(Out of band	SAW filter 30dB min fo±60MHz
attenuation)	(fo=1590MHz)
Output V.S.W.R	2.0 max

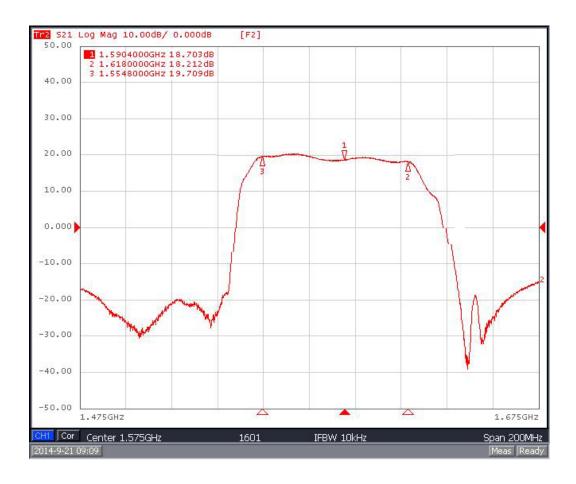



5 · ANTENNA DIMENSIONS

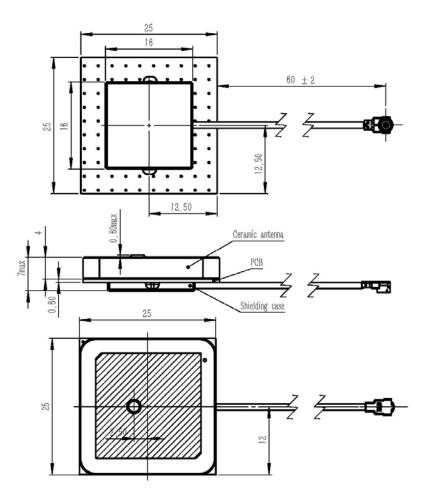

Unit : mm

6 • OPERATING CONDITION

Temperature	-40°C to +85°C
Humidity	10% to 95% RH

7 · STORAGE CONDITION

Temperature	-40°C to +85°C
Humidity	10% to 95% RH



8 • Note

8.1 • This product specification guarantees the quality of our product as a single unit. Please make sure that your product is evaluated and confirmed against your specifications when our product is mounted to your product.

 $8.2 \cdot$ We cannot warrant against failure caused by any use of our product that deviates from the intended use as described in this product specification.

8.3 • The product will get free warranty for one year since the date of purchase users operate in the corrct way; users will have to pay cost of the materials and maintaining fee out of the condition.