# **GPS & GLONASS Internal Antenna**

**Product Number: ATIGG2540** 

#### 1 · SCOPE

This product can be used as various GPS receivers navigation, GPS clock, positioning.


#### 2 · OVERALL PERFORMANCE(Antenna Element, LNA & Cable)

CHARACTERISTICS	SPEC
Center Frequency	GPS: 1575.42±1.023MHz
	GLONASS: 1602~1615.5±0.51 MHz
	(When the antenna are placed on the customer's
	device inside)
Voltage	DC 2.7 - 5V
Current	13 mA max
Gain	25dB typ
Noise Figure	2.0dB max
Bandwidth(10dB return loss)	10 MHz min
Output VSWR	2.0 max
Output Impedance	50ohm
Dimensions	25mm(L)×25mm(W)×6.8 mm(H) typ
Weight	9±2g(typ)
Cable	60±2mm (Ф=1.13mm)
Connector	IPEX (Pull=0.4Kg)

# **ATIGG Series**

#### 3 · Patch antenna


CHARACTERISTICS	SPEC
Dimensions	25mm(L)×25mm(W)×4mm(H) typ
Center Frequency	GPS: 1575.42±1.023MHz GLONASS: 1602~1615.5±0.51 MHz (27mm(L)×27mm(W) Ground)
Bandwidth(10dB return loss)	10 MHz min
Peak Gain	2.0 dB typ
Output V.S.W.R	2.0dB max
Output Impedance	50ohm
Polarization	R.H.C.P

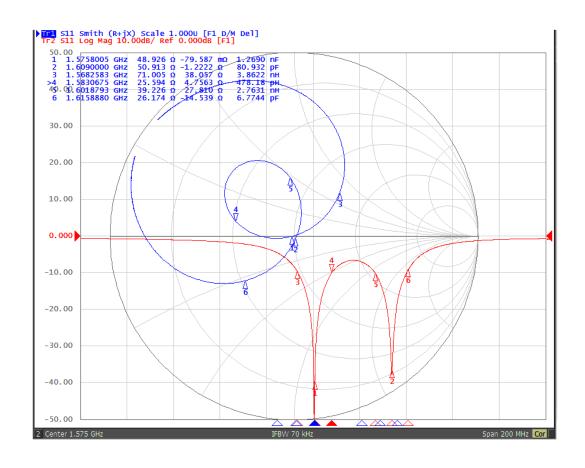


# **ATIGG Series**

#### 4 · LNA/Filter

CHARACTERISTICS	SPEC
Voltage	DC 2.7 - 5V
Current	13 mA max
Center Frequency	GPS: 1575.42±1.023MHz GLONASS: 1602~1615.5±0.51 MHz
Gain	25 ±2dB typ
Noise Figure	1.5dB max
Filter(Out of band attenuation)	SAW filter 30dB min fo±60MHz (fo=1590MHz)
Output V.S.W.R	2.0 max

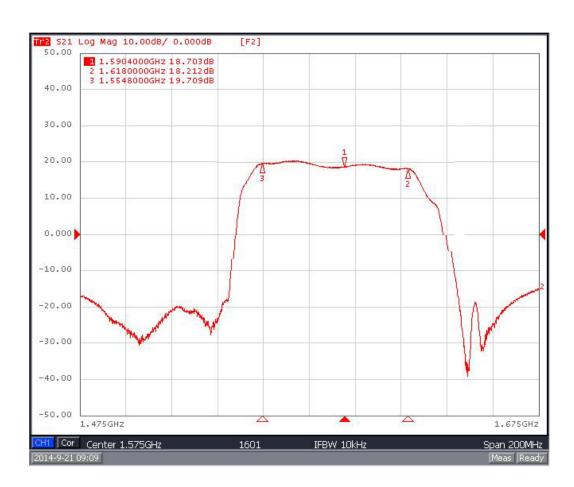

#### **5 · ANTENNA DIMENSIONS**

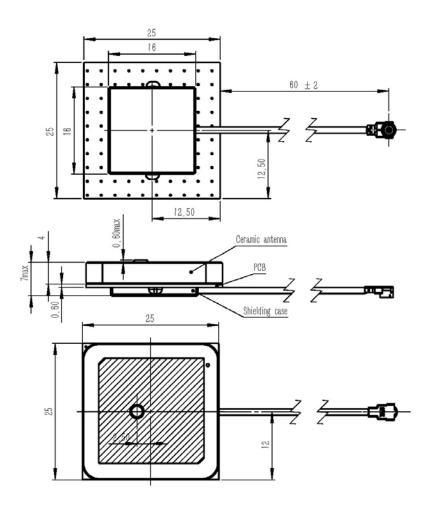

Unit: mm

#### **6 · OPERATING CONDITION**

Temperature	-40°C to +85°C
Humidity	10% to 95% RH

### 7 · STORAGE CONDITION

Temperature	-40°C to +85°C
Humidity	10% to 95% RH

### **ATIGG Series**

#### 8 Note

- 8.1 This product specification guarantees the quality of our product as a single unit. Please make sure that your product is evaluated and confirmed against your specifications when our product is mounted to your product.
- 8.2 We cannot warrant against failure caused by any use of our product that deviates from the intended use as described in this product specification.
- 8.3 The product will get free warranty for one year since the date of purchase users operate in the correct way; users will have to pay cost of the materials and maintaining fee out of the condition