


M16 male front mount plug connector

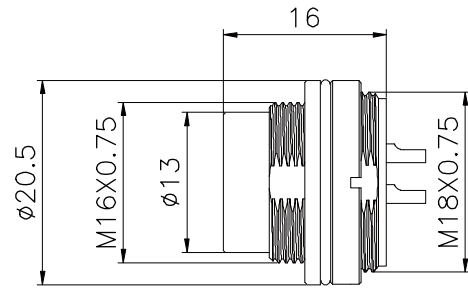

Technical parameters

Shell material	Copper/Zinc
Core material	PA66
Overmold material	PVC/TPU [®]
Terminal material	Phosphor copper
Temperature	-20°C~+80°C

Insulation resistance	≥100mΩ
Contact resistance	≤5mΩ
Degree of protection	IP67/IP68
Mating cycle	≥500次
Cable diameter	

M 16

Electric parameter

pin number	code type A	rated current	rated voltage		cable size		cable material	dealing at the end cable
			A/C	D/C	AWG	mm ²		
2		7A	250V	250V	20	0.75	PVC/PUR	- no dealing - customized - strip and tinn - to other connector
3		7A	250V	250V	20	0.75	PVC/PUR	
4		6A	250V	250V	20	0.75	PVC/PUR	
5		6A	250V	250V	20	0.75	PVC/PUR	
6		5A	250V	250V	20	0.75	PVC/PUR	
7		5A	125V	125V	20	0.75	PVC/PUR	
8		5A	125V	125V	20	0.75	PVC/PUR	
12		3A	60V	60V	24	0.25	PVC/PUR	
14		3A	60V	60V	24	0.25	PVC/PUR	
19		3A	60V	60V	24	0.25	PVC/PUR	
24		1A	60V	60V	26	0.14	PVC/PUR	

Order method

<p>Ⓐ Regular type</p> <p>M16-<input type="text"/>-B-<input type="text"/>-P-<input type="text"/>-<input type="text"/>-<input type="text"/>-<input type="text"/></p> <p style="text-align: center;"> code type (except A type) cable material others </p> <p style="text-align: center;"> pin number overmold material cable length </p>	<p>Ⓑ Customized</p> <p>M16-<input type="text"/>-B-<input type="text"/>-P-<input type="text"/>-<input type="text"/></p> <p style="text-align: center;"> code type (except A type) others </p> <p style="text-align: center;"> pin number customized item number </p>
--	---