


M8 female angled assembly plastic socket connector

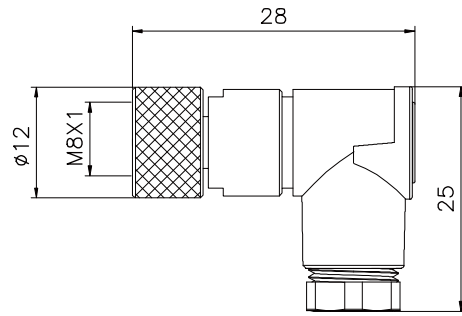

M 8

Technical parameters

Shell material	Copper/Zinc
Core material	PA66
Overmold material	PVC/TPU [®]
Terminal material	Phosphor copper
Temperature	-40°C~+80°C

Insulation resistance	≥100mΩ
Contact resistance	≤5mΩ
Degree of protection	IP67/IP68
Mating cycle	≥500次
Cable diameter	Ø3.5mm~Ø5mm

Electric parameter

pin number	code type		rated current	rated voltage		cable size		cable material [®]	dealing at the end cable
	A	B		A/C	D/C	AWG	mm ²		
3			3A	60V	60V	24	0.25	PVC/PUR	- no dealing - customized
4			3A	30V	30V	24	0.25	PVC/PUR	- strip and tinn - to other connector

Order method

<p>Ⓐ Regular type</p> <p>M8P-<input type="text"/>D-<input type="text"/>-S-<input type="text"/>-<input type="text"/>-<input type="text"/></p> <p>pin number code type (except A type) cable material[®] cable length others</p>	<p>Ⓑ Customized</p> <p>M8P-<input type="text"/>D-<input type="text"/>-S-<input type="text"/>-<input type="text"/>-<input type="text"/></p> <p>pin number customized item number others</p> <p>code type (except A type)</p>
---	---